



® LR 3902


UL DRY TYPE TRANSFORMER 77US E112313

LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE AUTOTRANSFORMER
AUTOTRANSFORMATEUR SEC TRIPHASÉ

HV/HT	600Y/346V (60HZ) 289A		Cust. Ref.	
	480Y/277V (50/60HZ) 289A		Réf. du client	
BIL	-		Serial No.	
			No. de série	
TERM. BORNES	H0 H1 H2 H3		Part No.	Y300PKCH3LOU
			No. de pièce	
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE
LV/BT	480Y/277V (60HZ) 361A		kVA	300
	380Y/219V (50/60HZ) 361A		TYPE	K
BIL	-		Cooling Refroidissement	ANN
			Temp. Rise Echauffement	150 °C
TERM. BORNES	X0 X1 X2 X3		Temp. Class Classe de Temp.	220 °C
			Frequency Fréquence	60 Hz
			Impédance % @ 170 °C	1.1
			Encl. Type Type de boîtier	3R
			Wt Poids lbs/kg	530/241
			Winding Enroulement	CU



D003302b1

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES EXCEPT WHEN WALL MOUNTED USING HPS WALL MOUNTING KIT

RATED KVA AT 50/60HZ:240KVA

VOLTAGES SHOWN ARE FOR 3 PHASE, 4 WIRE SYSTEMS. NEUTRAL AND GROUND CONNECTIONS SHOULD BE MADE IN ACCORDANCE WITH LOCAL ELECTRICAL CODE AND STANDARDS REQUIREMENTS





THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.



TITLE: 3PH AUTO TRANSFORMER NAMEPLATE INFORMATION				
1	15/06/22	RM	HCN: 53368	DES: RBHATIA
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2
EDB Y300PKCH3LOU

1.1 http://2026/03/31 23:01

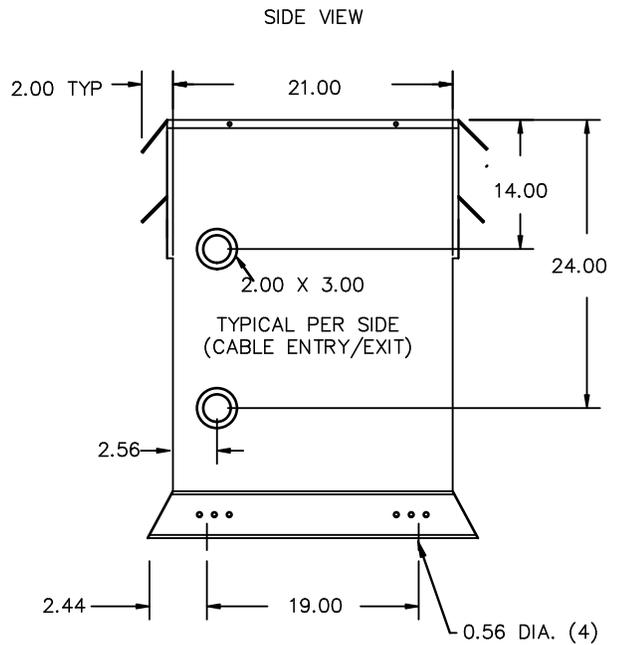
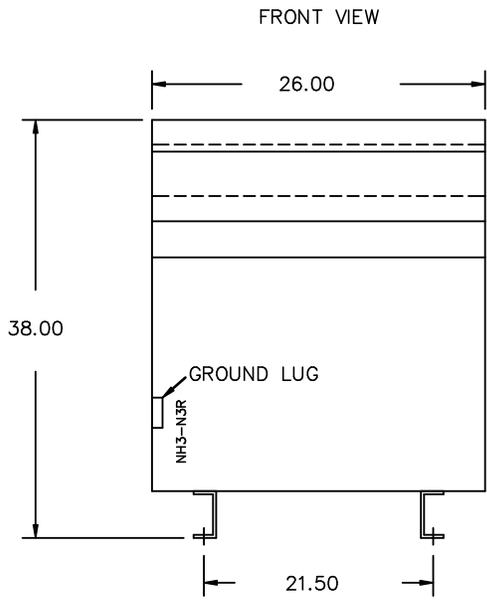


All Dimensions in inches

ENCLOSURE COLOR :ANSI 61 GREY- OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL



CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT



TITLE: 3PH AUTO TRANSFORMER				
1	15/06/22	RM	HCN: 53368	DES: RBHATIA
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDB Y300PKCH310U