hammond POWER SOLUTIONS

LR3902 LISTED E50394

GENERAL PURPOSE TRANSFORMER 252L

GUELPH, ONT. BARABOO,WI COMPTON, CA MONTERREY, MX


COMMERCIAL POTTED DISTRIBUTION TRANSFORMER

HV/HT	120,208,240,277V
BIL	–
TERM. BORNES	H1 H2

VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE
277	18.1		1–2
240	20.8		3–4
208	24.0		5–6
120	41.7		7–8

LV/BT	120/240V
BIL	–
TERM. BORNES	X4 X2 X3 X1

Cust. Ref. Réf. du client	
Serial No. No. de série	
Part No. No. de pièce	C1F005WES
Phase	1
kVA	5
TYPE	Q
Cooling Refroidissement	ANC
Temp. Class Classe de Temp.	180 ° C
Frequency Fréquence	60 Hz
Impédance % @ 135 °C	5.1
Encl. Type Type de boîtier	3R
Wt Poids lbs	150

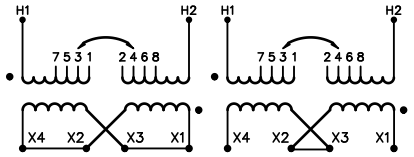

ELECTROSTATIC SHIELD

d0000134b

8 03423 09255 9

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

2.0 httpd 2026/11/05 02:30

hammond POWER SOLUTIONS


TITLE: 1PH DISTRIBUTION TRANSFORMER NAMEPLATE INFORMATION

NO.	DATE	BY	REVISION	
2	21/07/13	PP	EDB UPDATE	DES: LCEN
1	15/05/28	LC	CHANGED REMOVE RATED % VOLTAGE	DATE: 08/10/16
				SCALE: NTS


SHEET 1 OF 2

EDBC1F005WES

FRONT VIEW

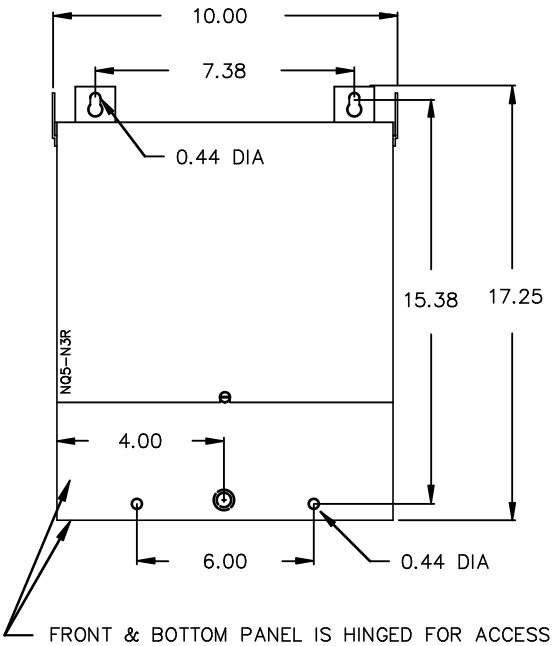

SIDE VIEW

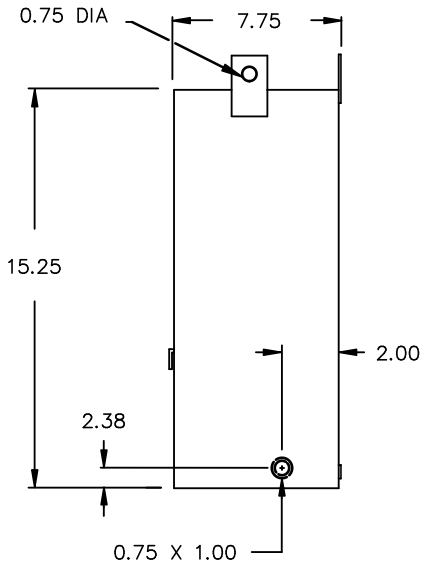

FRONT & BOTTOM PANEL IS HINGED FOR ACCESS TO TERMINALS, BOTTOM MOUNTING HOLES AND REAR KNOCKOUT.

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

CUSTOMER NOTES:
- HV1 TERMINATED AT BOTTOM REAR
- LV1 TERMINATED AT BOTTOM FRONT

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

2.0 httpd 2026/11/05 02:30

hammond POWER SOLUTIONS

TITLE: 1PH DISTRIBUTION TRANSFORMER

NO.	DATE	BY	REVISION
2	21/07/13	PP	EDB UPDATE
1	15/05/28	LC	CHANGED REMOVE RATED % VOLTAGE

DES: LCEN
DATE: 08/10/16
SCALE: NTS

SHEET 2 OF 2

EDBC1F005WES