hammond POWER SOLUTIONS

LR3902 LISTED E50394

GENERAL PURPOSE TRANSFORMER 252L

GUELPH, ONT. BARABOO,WI COMPTON, CA MONTERREY, MX


## COMMERCIAL POTTED DISTRIBUTION TRANSFORMER

| | |
|---|---|
| HV/HT | 240X480V |
| BIL | – |
| TERM. BORNES | H1 H2 |

| VOLTS | CURRENT COURANT | % RATED VOLTAGE % TENSION NOMINALE | CONNECTION EACH PHASE CONNEXION PAR PHASE |
|---|---|---|---|
| 504 | 19.8 | 105 | 1–2 |
| 492 | 20.3 | 102.5 | 2–3 |
| 480 | 20.8 | 100 | 3–4 |
| 468 | 21.4 | 97.5 | 4–5 |
| 456 | 21.9 | 95 | 5–6 |
| 444 | 22.5 | 92.5 | 6–7 |
| 432 | 23.1 | 90 | 7–8 |
| 240 | 41.6 | 100 | H1–4, H2–3 |
| 228 | 43.7 | 95 | H1–6, H2–5 |
| 216 | 46.2 | 90 | H1–8, H2–7 |

| | |
|---|---|
| LV/BT | 120/240V |
| BIL | – |
| TERM. BORNES | X4 X2 X3 X1 |

| | |
|---|---|
| Cust. Ref. Réf. du client | |
| Serial No. No. de série | |
| Part No. No. de pièce | C1F010LES |
| Phase | 1 |
| kVA | 10 |
| TYPE | Q |
| Cooling Refroidissement | ANC |
| Temp. Class Classe de Temp. | 180 ° C |
| Frequency Fréquence | 60 Hz |
| Impédance % @ 135 °C | 4.1 |
| Encl. Type Type de boîtier | 3R |
| Wt Poids lbs | 165 |

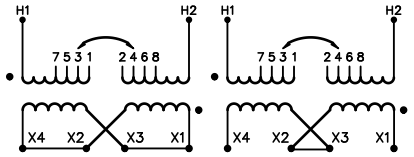


ELECTROSTATIC SHIELD

d0000134b

8 03423 09137 8

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

1.0 htpd 2026/11/05 04:27

hammond POWER SOLUTIONS

TITLE: 1PH DISTRIBUTION TRANSFORMER NAMEPLATE INFORMATION


| NO. | DATE | BY | REVISION |
|---|---|---|---|
| 1 | 21/07/13 | PP | EDB UPDATE |

DES: LCEN
DATE: 08/10/16
SCALE: NTS


SHEET 1 OF 2

EDBC1F010LES

FRONT VIEW

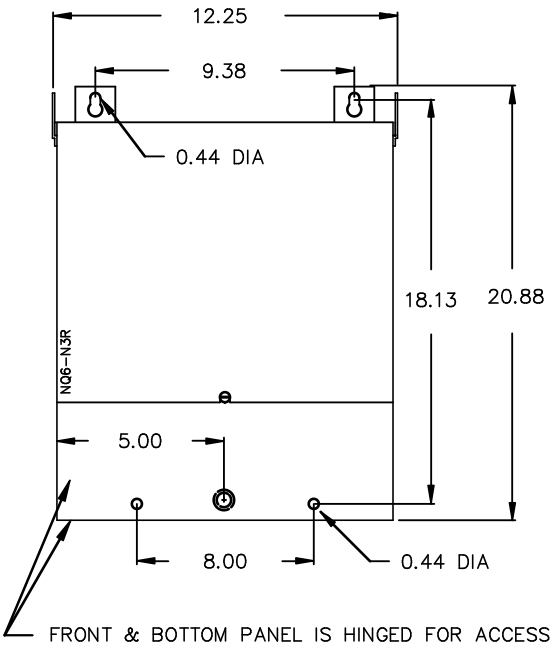


SIDE VIEW

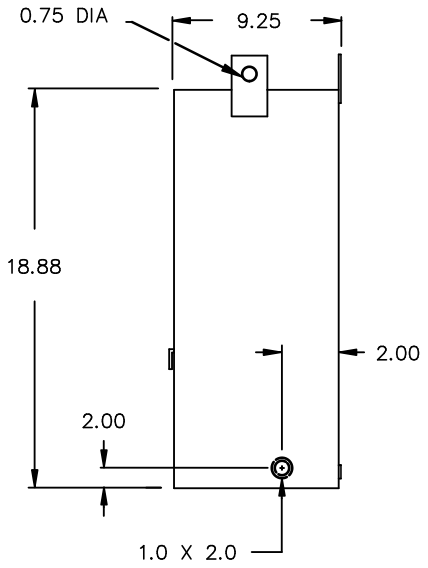


FRONT & BOTTOM PANEL IS HINGED FOR ACCESS TO TERMINALS, BOTTOM MOUNTING HOLES AND REAR KNOCKOUT.

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL

| MECHANICAL TYPE LUGS INCLUDED SUITABLE FOR #14–2 CU/AL CONDUCTORS 1 CONDUCTOR PER PHASE |
|---|

L.V.1. TERMINAL DETAIL

| MECHANICAL TYPE LUGS INCLUDED SUITABLE FOR #14–2 CU/AL CONDUCTORS 1 CONDUCTOR PER PHASE |
|---|

CUSTOMER NOTES:

- HV1 TERMINATED AT BOTTOM REAR
- LV1 TERMINATED AT BOTTOM FRONT

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

1.0 httpd 2026/11/05 04:27

hammond POWER SOLUTIONS

TITLE: 1PH DISTRIBUTION TRANSFORMER

| NO. | DATE | BY | REVISION |
|---|---|---|---|
| 1 | 21/07/13 | PP | EDB UPDATE |

DES: LCEN
DATE: 08/10/16
SCALE: NTS

SHEET 2 OF 2

EDBC1F010LES