


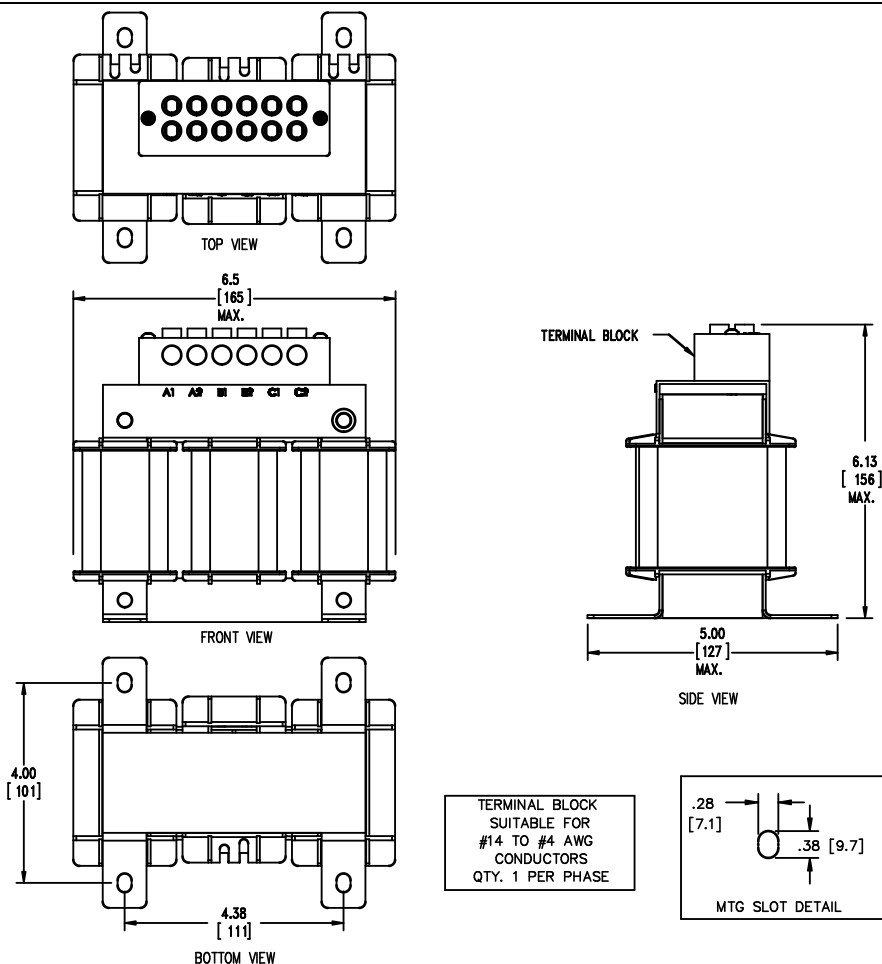

TOLERANCES  
MOUNTING CENTERS =  $\pm .06"$   
MOUNTING HOLE SIZE =  $\pm .005"$

THIS DRAWING CONTAINS PROPRIETARY INFORMATION  
BELONGING TO HAMMOND POWER SOLUTIONS INC.,  
AND IS NOT FOR GENERAL DISTRIBUTION

All Dimensions in Inches  
mm in Parenthesis

REACTOR

**hammond** HPS CENTURION R  
POWER SOLUTIONS 3PH DRY TYPE  
CRX0046CC REACTOR

0.36 MH 50/60 HZ 46 AMPS  
0.6 KV CLASS TEMP CLASS: 130 TYPE JR-3  
AMBIENT: 50°C

NOTES:



TITLE: 3 PHASE LINE REACTOR

|        |          |
|--------|----------|
| DES:   | PBAKER   |
| DATE:  | 14/06/25 |
| SCALE: | NTS      |

NO. DATE BY REVISION

SHEET 1 OF 1

EDBCRX0046CC