



® LR 3902


UL DRY TYPE TRANSFORMER 77US E112313

LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE AUTOTRANSFORMER
AUTOTRANSFORMATEUR SEC TRIPHASE

HV/HT	600Y/346V 480Y/277V			Cust. Ref. Réf. du client	
BIL	-			Serial No. No. de série	
TERM. BORNES	H0 H1 H2 H3 H4 H5 H6			Part No. No. de pièce	Y075QTCH3L0U
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA
	600Y/346V 480Y/277V	72.2 90.2		H0 H1 H2 H3 H0 H4 H5 H6	75
	400Y/231V 240Y/139V 208Y/120V	108.3 180.4 208.2		X0 X7 X8 X9 X0 X4 X5 X6 X0 X1 X2 X3	TYPE K
LV/BT	208Y/120V 240Y/139V 400Y/231V				Cooling Refrondissement ANN
BIL	-			Temp. Rise Echauffement	150 °C
TERM. BORNES	X0 X1 X2 X3 X4 X5 X6 X7 X8 X9			Temp. Class Classe de Temp.	220 °C
				Frequency Fréquence	60 Hz
				Impédance % @ 170 °C	2.5
				Encl. Type Type de boîtier	3R
				Wt Poids	400 lbs
				Winding Enroulement	CU

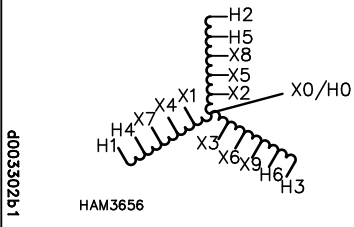

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES EXCEPT WHEN WALL MOUNTED USING HPS WALL MOUNTING KIT

VOLTAGES SHOWN ARE FOR 3 PHASE, 4 WIRE SYSTEMS. NEUTRAL AND GROUND CONNECTIONS SHOULD BE MADE IN ACCORDANCE WITH LOCAL ELECTRICAL CODE AND STANDARDS REQUIREMENTS



THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.



TITLE: 3PH AUTO TRANSFORMER NAMEPLATE INFORMATION				DES: RMOVVA
				DATE: 10/04/13
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2
EDB Y075QTCH3L0U



All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

H.V.2. TERMINAL DETAIL

L.V.2. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #2/0-14 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 600MCM-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #2/0-14 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 600MCM-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- HV2 TERMINATED AT TOP FRONT
- LV2 TERMINATED AT BOTTOM FRONT
- LV3 TERMINATED AT TOP FRONT



TITLE: 3PH AUTO TRANSFORMER

DES:	RMOVVA
DATE:	10/04/13
SCALE:	NTS

NO.	DATE	BY	REVISION

SHEET 2 OF 2

EDB Y0750TCH310U