hammond POWER SOLUTIONS

LR3902 LISTED E50394

GENERAL PURPOSE TRANSFORMER 252L

GUELPH, ONT. BARABOO,WI COMPTON, CA MONTERREY, MX


COMMERCIAL POTTED DISTRIBUTION TRANSFORMER

HV/HT	208X416V
BIL	–
TERM. BORNES	H1 H2

VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE
437	17.2	105	1–2
426	17.6	102.5	2–3
416	18.0	100	3–4
406	18.5	97.5	4–5
395	19.0	95	5–6
385	19.5	92.5	6–7
374	20.0	90	7–8
208	36.1	100	H1–4,H2–3
198	37.8	95	H1–6,H2–5
187	40.1	90	H1–8,H2–7

LV/BT	120 / 240V
BIL	–
TERM. BORNES	X4 X2 X3 X1

Cust. Ref. Réf. du client	
Serial No. No. de série	
Part No. No. de pièce	C1F007GES
Phase	1
kVA	7.5
TYPE	Q
Cooling Refroidissement	ANC
Temp. Class Classe de Temp.	180 ° C
Frequency Fréquence	60 Hz
Impédance % @ 135 °C	3.6
Encl. Type Type de boîtier	3R
Wt Poids lbs	160

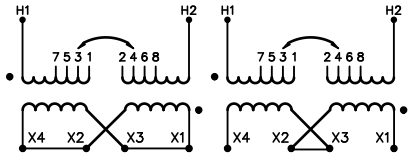

ELECTROSTATIC SHIELD

d0000134b

8 03423 09154 5

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

1.0 httpd 2026/11/05 06:59

hammond POWER SOLUTIONS

TITLE: 1PH DISTRIBUTION TRANSFORMER NAMEPLATE INFORMATION


NO.	DATE	BY	REVISION
1	21/07/13	PP	EDB UPDATE

DES: LCEN
DATE: 08/10/16
SCALE: NTS


SHEET 1 OF 2

EDBC1F007GES

FRONT VIEW

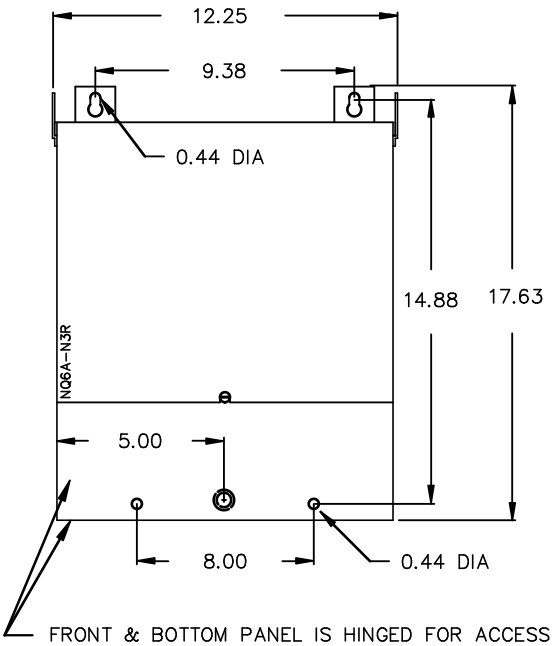

SIDE VIEW

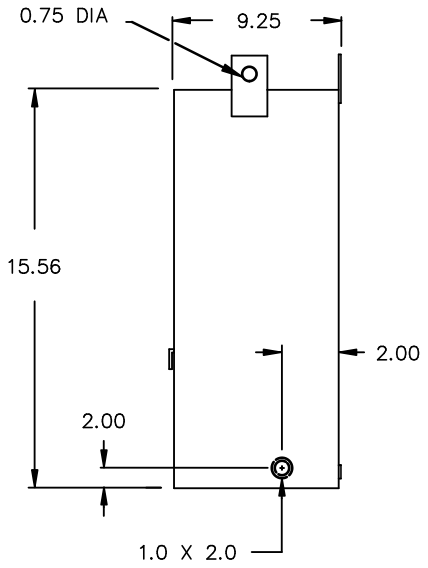

FRONT & BOTTOM PANEL IS HINGED FOR ACCESS TO TERMINALS, BOTTOM MOUNTING HOLES AND REAR KNOCKOUT.

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

CUSTOMER NOTES:
- HV1 TERMINATED AT BOTTOM REAR
- LV1 TERMINATED AT BOTTOM FRONT

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

1.0 httpd 2026/11/05 06:59

hammond POWER SOLUTIONS

TITLE: 1PH DISTRIBUTION TRANSFORMER

NO.	DATE	BY	REVISION
1	21/07/13	PP	EDB UPDATE

DES: LCEN
DATE: 08/10/16
SCALE: NTS

SHEET 2 OF 2

EDBC1F007GES