hammond POWER SOLUTIONS

LR3902 LISTED E50394

GENERAL PURPOSE TRANSFORMER 252L

GUELPH, ONT. BARABOO,WI COMPTON, CA MONTERREY, MX


COMMERCIAL POTTED DISTRIBUTION TRANSFORMER

HV/HT	240X480V
BIL	–
TERM. BORNES	H1 H2

VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE
504	29.8	105	1–2
492	30.5	102.5	2–3
480	31.2	100	3–4
468	32.1	97.5	4–5
456	32.9	95	5–6
444	33.8	92.5	6–7
432	34.7	90	7–8
240	62.4	100	H1–4, H2–3
228	65.8	95	H1–6, H2–5
216	69.4	90	H1–8, H2–7

LV/BT	120/240V
BIL	–
TERM. BORNES	X4 X2 X3 X1

Cust. Ref. Réf. du client	
Serial No. No. de série	
Part No. No. de pièce	C1F015LES
Phase	1
kVA	15
TYPE	Q
Cooling Refroidissement	ANC
Temp. Class Classe de Temp.	180 ° C
Frequency Fréquence	60 Hz
Impédance % @ 135 °C	2.4
Encl. Type Type de boîtier	3R
Wt Poids lbs	280

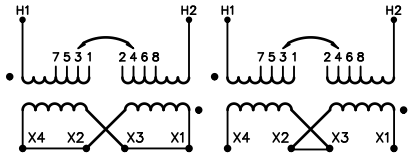

ELECTROSTATIC SHIELD

d0000134b

8 03423 09138 5

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

1.0 httpd 2026/11/04 08:28

hammond POWER SOLUTIONS

TITLE: 1PH DISTRIBUTION TRANSFORMER NAMEPLATE INFORMATION


NO.	DATE	BY	REVISION
1	21/07/13	PP	EDB UPDATE

DES: WWONG
DATE: 08/10/31
SCALE: NTS


SHEET 1 OF 2

EDBC1F015LES

FRONT VIEW

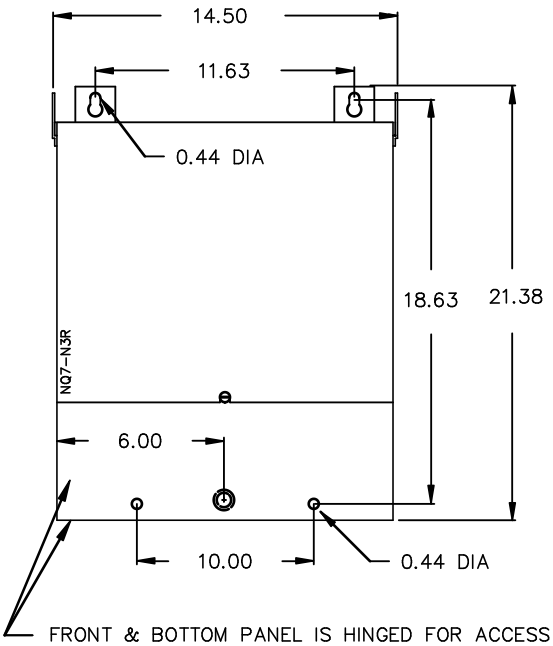

SIDE VIEW

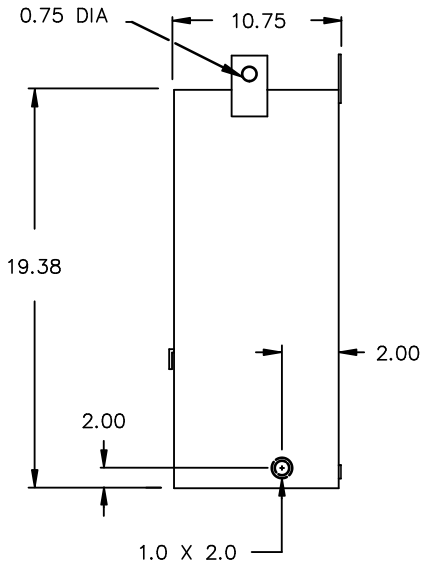


FRONT & BOTTOM PANEL IS HINGED FOR ACCESS TO TERMINALS, BOTTOM MOUNTING HOLES AND REAR KNOCKOUT.

All Dimensions in inches


ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL



MATERIAL: 1/8" THICK CU.

L.V.1. TERMINAL DETAIL



MATERIAL: 1/8" THICK CU.

CUSTOMER NOTES:

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

1.0 httpd 2026/11/04 08:28

hammond POWER SOLUTIONS

TITLE: 1PH DISTRIBUTION TRANSFORMER

NO.	DATE	BY	REVISION
1	21/07/13	PP	EDB UPDATE

DES: WWONG
DATE: 08/10/31
SCALE: NTS

SHEET 2 OF 2

EDBC1F015LES