hammond POWER SOLUTIONS

LR3902 LISTED E50394

GENERAL PURPOSE TRANSFORMER 252L

GUELPH, ONT. BARABOO,WI COMPTON, CA MONTERREY, MX


COMMERCIAL POTTED DISTRIBUTION TRANSFORMER

HV/HT	120/208/240/277V
BIL	–
TERM. BORNES	H1 H2 H3 H4 H5

VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE
120	0.5		H1–H2
208	0.3		H1–H3
240	0.3		H1–H4
277	0.2		H1–H5

LV/BT	120/240V 0.4/0.2A
BIL	–
TERM. BORNES	X4 X2 X3 X1

Cust. Ref. Réf. du client	
Serial No. No. de série	
Part No. No. de pièce	C1FC05WE
Phase	1
kVA	0.05
TYPE	Q
Cooling Refroidissement	ANC
Temp. Class Classe de Temp.	130 °C
Frequency Fréquence	60 Hz
Impédance % @ °C	
Encl. Type Type de boîtier	3R
Wt Poids lbs/kg	7.7/3.5



D0000151Rev1

8 03423 09354 9

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

3.0 httpd 2026/11/06 01:01

hammond POWER SOLUTIONS


TITLE: 1 PHASE ENCAPSULATED TRANSFORMER NAMEPLATE INFORMATION

NO.	DATE	BY	REVISION	
3	26/04/17	MS	UPDATED PER NEW DESIGN	DES: LCEN
2	21/07/13	PP	EDB UPDATE	DATE: 08/12/16
				SCALE: NTS


SHEET 1 OF 2

EDBC1FC05WE

FRONT VIEW

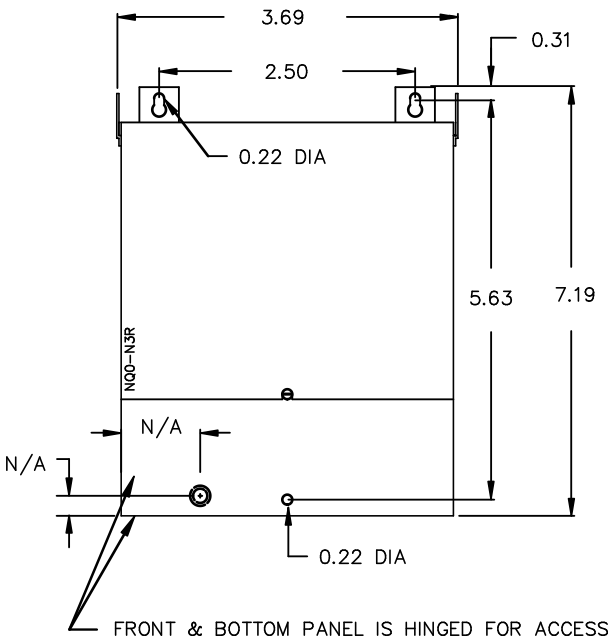

SIDE VIEW

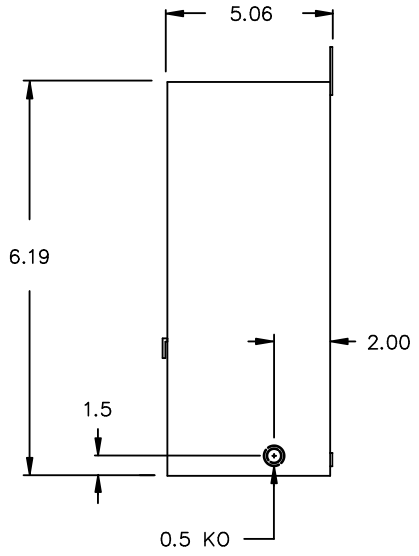

FRONT & BOTTOM PANEL IS HINGED FOR ACCESS TO TERMINALS, BOTTOM MOUNTING HOLES AND REAR KNOCKOUT.

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

CUSTOMER NOTES:
- HV TERMINATED AT #18 AWG LEAD WIRE
- LV TERMINATED AT #18 AWG LEAD WIRE

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

3.0 httpd 2026/11/06 01:01

hammond POWER SOLUTIONS

TITLE: 1 PHASE ENCAPSULATED TRANSFORMER

NO.	DATE	BY	REVISION
3	26/04/17	MS	UPDATED PER NEW DESIGN
2	21/07/13	PP	EDB UPDATE

DES: LCEN
DATE: 08/12/16
SCALE: NTS

SHEET 2 OF 2

EDBC1FC05WE