



® LR 3902

UL DRY TYPE TRANSFORMER 774J5 E112313

LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER  
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	460V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DMO 14JC
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	14
	483	16.7	105	1	TYPE	K
	460	17.6	100	2	Cooling Refroidissement	ANN
	437	18.5	95	3	Temp. Rise Echauffement	150 °C
					Temp. Class Classe de Temp.	220 °C
					Frequency Fréquence	60 Hz
					Impédance % @ 170 °C	5.4
LV/BT	230Y/133V				Encl. Type Type de boîtier	3R
BIL	-				Wt Poids	190 lbs
TERM. BORNES	X0 X1 X2 X3				Winding Enroulement	AL



SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 1 INCHES

d003102b




TITLE: 3PH DRIVE TRANSFORMER  
NAMEPLATE INFORMATION

2	21/07/13	PP	EDB UPDATE	DES: MFAHRIO
1	19/12/17	CS	CROSS TO KD	DATE: 05/05/09
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM014JC

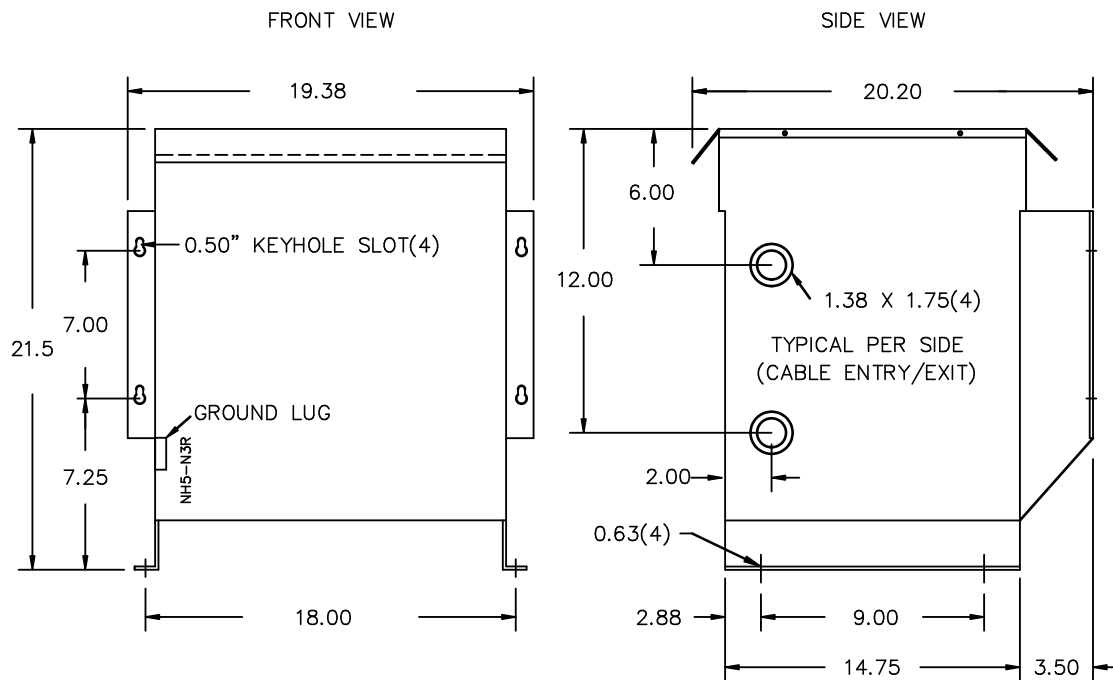

All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR.

LV TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED  
SUITABLE FOR #14-2 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV TERMINATED AT BOTTOM FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

2	21/07/13	PP	EDB UPDATE	DES: MFAHRIO
1	19/12/17	CS	CROSS TO KD	DATE: 05/05/09
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM014JC