



® LR 3902


UL DRY TYPE TRANSFORMER 774J5 E112313

LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER  
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	575V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM034NJ
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	34
	604	32.5	105	1	TYPE	K
	589	33.3	102.5	2	Cooling Refroidissement	ANN
	575	34.1	100	3	Temp. Rise Echauffement	150 °C
	561	35.0	97.5	4	Temp. Class Classe de Temp.	220 °C
	546	36.0	95	5	Frequency Fréquence	60 Hz
					Impédance % @ 170 °C	4.2
LV/BT	460Y/265V				Encl. Type Type de boîtier	NEMA-3R
BIL	-				Wt Poids	355 lbs
TERM. BORNES	X0 X1 X2 X3				Winding Enroulement	CU

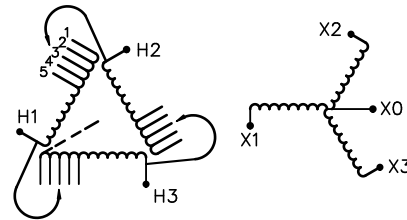

4003102b



TITLE: 3PH DISTRIBUTION TRANSFORMER  
NAMEPLATE INFORMATION

4	21/07/16	PP	EDB UPDATE	DES: VGAGAC
3	05/04/19	GR	HCN: 24234	DATE: 00/06/05
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM034NJ

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.  
4.0 httpd 2026/04/14 16:35

FRONT VIEW

SIDE VIEW



All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED  
SUITABLE FOR #14-2 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED  
SUITABLE FOR #14-2 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"-THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DISTRIBUTION TRANSFORMER

4	21/07/16	PP	EDB UPDATE	DES: VGAGAC
3	05/04/19	GR	HCN: 24234	DATE: 00/06/05
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM034NJ