



® LR 3902

UL DRY TYPE TRANSFORMER 774J5 E112313


LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER  
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	230V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM051CC
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	51
	242 230 218	122 128 135	105 100 95	1 2 3	TYPE	K
	230Y/133V				LV/BT	
	-				BIL	
TERM. BORNES	X0 X1 X2 X3				Wt Poids	380 lbs
					Winding Enroulement	AL

Cooling Refroidissement	ANN
Temp. Rise Echauffement	150 °C
Temp. Class Classe de Temp.	220 °C
Frequency Fréquence	60 Hz
Impédance % @ 170 °C	4.9
Encl. Type Type de boîtier	3R

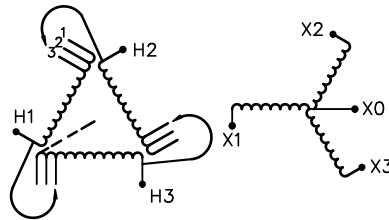

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES

d003102b



TITLE: 3PH DRIVE TRANSFORMER  
NAMEPLATE INFORMATION


5	21/07/13	PP	EDB UPDATE	DES: MBURSAC
4	15/08/10	RM	HCN: 60717	DATE: 01/01/24
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM051CC

FRONT VIEW

SIDE VIEW

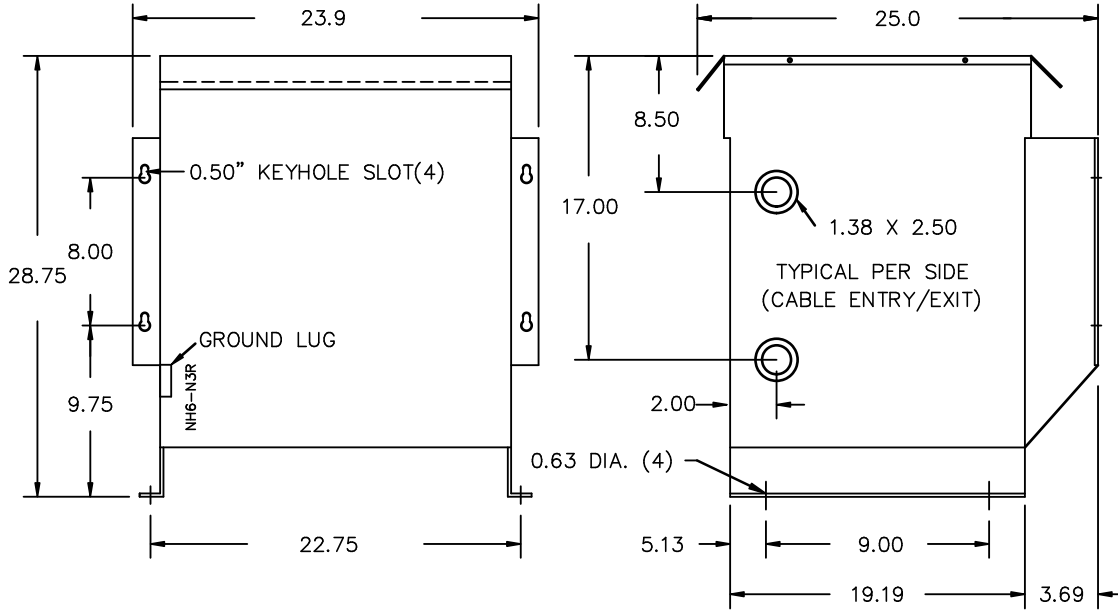

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED  
SUITABLE FOR 250MCM-6 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED  
SUITABLE FOR 250MCM-6 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

5	21/07/13	PP	EDB UPDATE	DES: MBURSAC
4	15/08/10	RM	HCN: 60717	DATE: 01/01/24
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM051CC