hammond POWER SOLUTIONS

LR 3902

DRY TYPE TRANSFORMER 77U5 E112313 LISTED

GUELPH, ONT. BARABOO,WI COMPTON, CA MONTERREY, MX


THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASÉ POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	230V
BIL	–
TERM. BORNES	H1 H2 H3

VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE
242	657	105	1
236	673	102.5	2
230	690	100	3
224	708	97.5	4
218	727	95	5

LV/BT	230Y/133V
BIL	–
TERM. BORNES	X0 X1 X2 X3

Cust. Ref. Réf. du client	
Serial No. No. de série	
Part No. No. de pièce	DM275CC
kVA	275
TYPE	K
Cooling Refroidissement	ANN
Temp. Rise Échauffement	150 ° C
Temp. Class Classe de Temp.	220 ° C
Frequency Fréquence	60 Hz
Impédance % @ 170 °C	6.8
Encl. Type Type de boîtier	3R
Wt Poids lbs/kg	1530/694
Winding Enroulement	AL

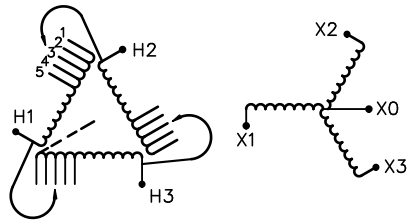

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES

d0031025

8 03423 00421 7

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.0 httpd 2026/11/05 13:10

hammond POWER SOLUTIONS

TITLE: 3PH DRIVE TRANSFORMER NAMEPLATE INFORMATION


NO.	DATE	BY	REVISION

DES: MRAHEEM
DATE: 26/04/22
SCALE: NTS


SHEET 1 OF 2

EDBDM275CC

FRONT VIEW

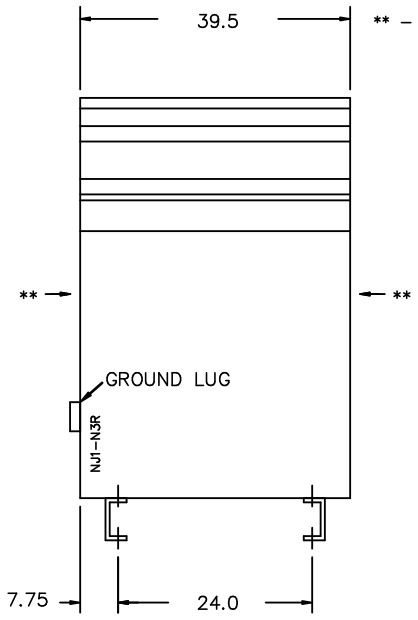


SIDE VIEW

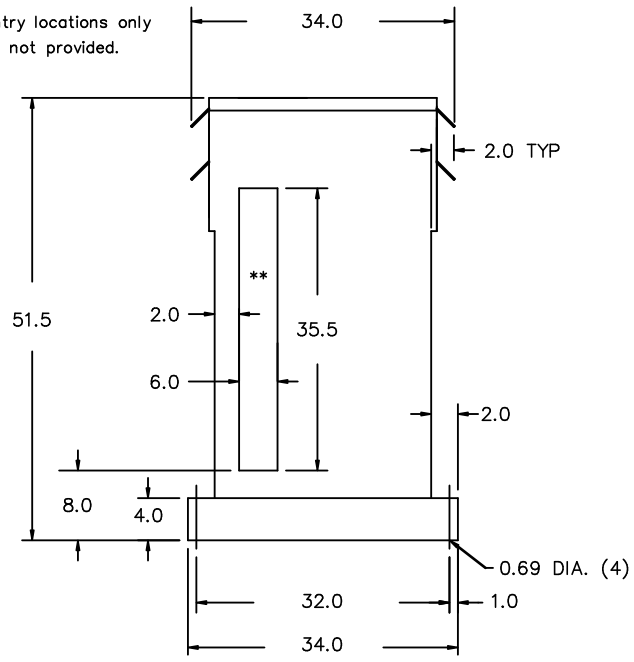


All Dimensions in inches

ENCLOSURE COLOR :ANSI 61 GREY – OUTDOOR

HV TERMINAL DETAIL



LV TERMINAL DETAIL



CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1–"NC"– THERMOSTAT PER COIL CONNECTED TO T.B.

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

hammond POWER SOLUTIONS

TITLE: 3PH DRIVE TRANSFORMER

NO.	DATE	BY	REVISION

DES: MRAHEEM
DATE: 26/04/22
SCALE: NTS

SHEET 2 OF 2

EDBDM275CC

0.0 httpd 2026/11/05 13:10