hammond POWER SOLUTIONS

LR 3902

DRY TYPE TRANSFORMER 77U5 E112313 LISTED

GUELPH, ONT. BARABOO,WI COMPTON, CA MONTERREY, MX


THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASÉ POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	460V
BIL	–
TERM. BORNES	H1 H2 H3

VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE
483	526	105	1–2
472	539	102.5	2–3
460	552	100	3–4
448	566	97.5	4–5
437	581	95	5–6

LV/BT	230Y/133V
BIL	–
TERM. BORNES	X0 X1 X2 X3

Cust. Ref. Réf. du client	
Serial No. No. de série	
Part No. No. de pièce	DM440JC
kVA	440
TYPE	K
Cooling Refroidissement	ANN
Temp. Rise Échauffement	150 ° C
Temp. Class Classe de Temp.	220 ° C
Frequency Fréquence	60 Hz
Impédance % @ 170 °C	6.1
Encl. Type Type de boîtier	3R
Wt Poids lbs	2300
Winding Enroulement	AL

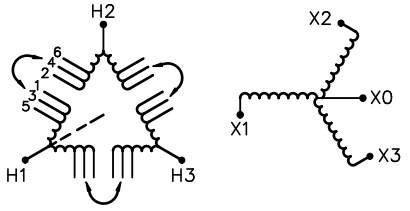

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 8.25 INCHES

d003102b

8 03423 00447 7

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

hammond POWER SOLUTIONS

TITLE: 3PH DRIVE TRANSFORMER NAMEPLATE INFORMATION


NO.	DATE	BY	REVISION	
4	21/07/16	PP	EDB UPDATE	DES: GPATEL
3	18/10/05	RM	CHANGED NPL VER:	DATE: 04/10/15
				SCALE: NTS

SHEET 1 OF 2


EDBDM440JC

4.0 httpd 2026/11/04 09:20

FRONT VIEW

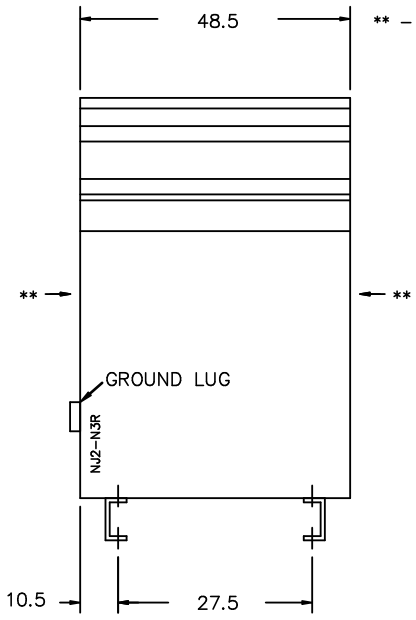


SIDE VIEW

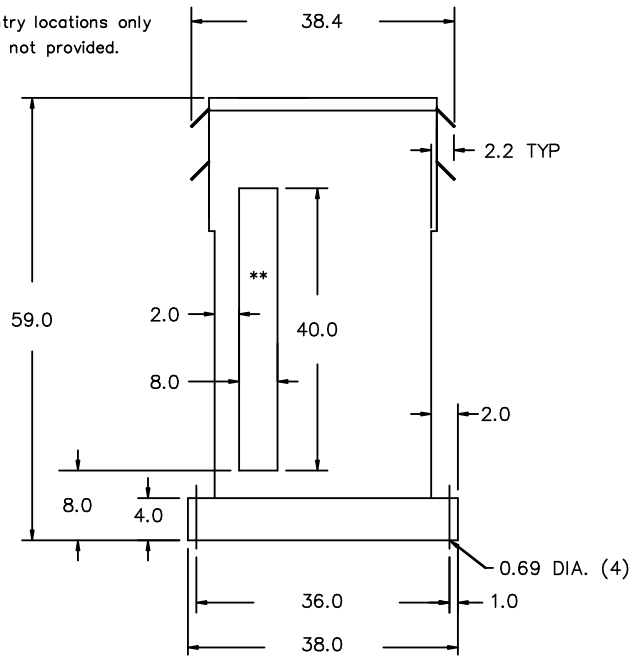


All Dimensions in inches

ENCLOSURE COLOR :ANSI 61 GREY – OUTDOOR

HV TERMINAL DETAIL



LV TERMINAL DETAIL



CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1–"NC"– THERMOSTAT PER COIL CONNECTED TO T.B.

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

hammond POWER SOLUTIONS

TITLE: 3PH DRIVE TRANSFORMER

NO.	DATE	BY	REVISION	SCALE: NTS
4	21/07/16	PP	EDB UPDATE	DES: GPATEL
3	18/10/05	RM	CHANGED NPL VER:	DATE: 04/10/15

SHEET 2 OF 2

EDBDM440JC

4.0 httpd 2026/11/04 09:20