



Hammond
Power Solutions


GUELPH, ONT. BARABOO, WI. COMPTON, CA MONTERREY, MX



UL US LISTED

31GW E258346

SINGLE PHASE DRY TYPE TRANSFORMER
TRANSFORMATEUR SEC MONOPHASE

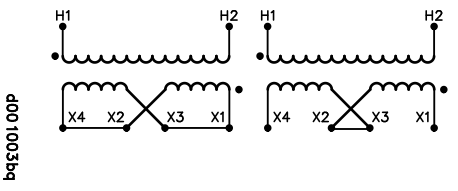HV/HT	600V 8.3A				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2				Part No. No. de pièce	Q005PEKF
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	5
					TYPE	HZQ
					Cooling Refroidissement	ANC
					Temp. Rise Echauffement	115 °C
					Temp. Class Classe de Temp.	180 °C
					Frequency Fréquence	60 Hz
					Impedance % @ 135 °C	3.4
					Encl. Type Type de boîtier	3R
					Wt lbs/kg	101/46
					Poids	
					Winding Enroulement	COPPER
					GENERAL PURPOSE TRANSFORMER FOR USE IN HAZARDOUS LOCATIONS ABS CERT. NO.19-HS1854283-PDA SPACINGS BETWEEN ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 1 INCHES ELECTROSTATIC SHIELD TEMPERATURE CLASSIFICATION: T3A	
LV/BT	120V/240V 20.8/41.7A					
BIL	-					
TERM. BORNES	X4 X2 X3 X1					
						



Hammond Power
Solutions Inc.

TITLE: 1PH DISTRIBUTION TRANSFORMER
NAMEPLATE INFORMATION

3	22/04/21	LC	CHANGED ADD SECONDARY	DES: RBHATIA
2	21/09/22	LC	CHANGED NOTES:	DATE: 00/07/26
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 3

EDBQ005PEKF

3.0 Icon 2022/04/21 15:05



HPS TITAN

General Purpose Transformer for use in Hazardous Locations

Class I, Division 2, Groups A, B, C, & D
Class I, Zone 2, Group IIC, T3
Hazardous Locations

**WARNING - EXPLOSION HAZARD - DO NOT DISCONNECT
EQUIPMENT WHILE THE CIRCUIT IS LIVE OR UNLESS THE AREA
IS KNOWN TO BE FREE OF IGNITABLE CONCENTRATIONS.
WARNING - EXPLOSION HAZARD - SUBSTITUTION OF ANY
COMPONENT MAY IMPAIR SUITABILITY FOR
CLASS 1, DIVISION 2.**

LAB62181



**Hammond Power
Solutions Inc.**

TITLE: 1PH DISTRIBUTION TRANSFORMER


3	22/04/21	LC	CHANGED ADD SECONDARY	DES: RBHATIA
2	21/09/22	LC	CHANGED NOTES:	DATE: 00/07/26
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 3

EDB0005PEKF

3.0 Icon 2022/04/21 15:05


FRONT VIEW

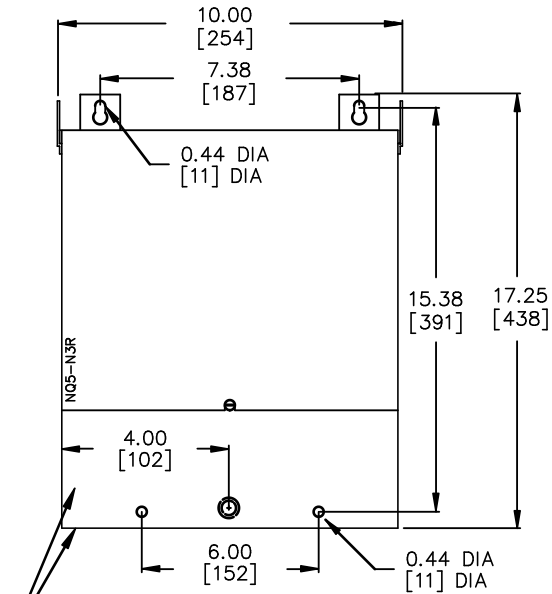

FRONT & BOTTOM PANEL IS HINGED FOR ACCESS TO
TERMINALS, BOTTOM MOUNTING HOLES AND REAR KNOCKOUT.

All Dimensions in inches[mm]

SIDE VIEW

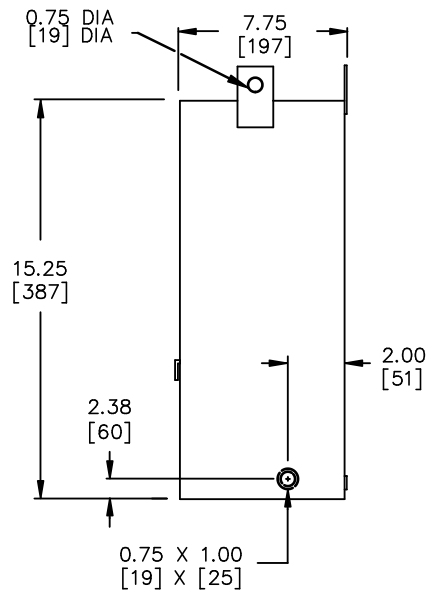

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

CUSTOMER NOTES:

- HV1 TERMINATED AT LEADS
- LV1 TERMINATED AT LEADS
- ..



TITLE: 1PH DISTRIBUTION TRANSFORMER

3	22/04/21	LC	CHANGED ADD SECONDARY	DES: RBHATIA
2	21/09/22	LC	CHANGED NOTES:	DATE: 00/07/26
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 3 OF 3

EDB0005PEKF

3.0 Icon 2022/04/21 15:05